

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
 International Bureau




(43) International Publication Date  
 18 September 2003 (18.09.2003)

PCT

(10) International Publication Number  
 WO 03/076253 A1

- (51) International Patent Classification<sup>7</sup>: **B62D 7/18**, F16C 33/46
- (21) International Application Number: PCT/EP03/02072
- (22) International Filing Date: 28 February 2003 (28.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
 0205508.5 8 March 2002 (08.03.2002) GB
- (71) Applicant (for all designated States except US): **THE TIMKEN COMPANY** [US/US]; 1835 Dueber Avenue S.W., Canton, OH 44706-2798 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DURAND, Jean-Sebastien** [FR/FR]; 6, Rue du Frankenbourg, F-67730 La Vancelle (FR).
- (74) Agent: **MARLES, Alan, David**; Stevens, Hewlett & Perkins, 1 St Augustines Place, Bristol BS1 4UD (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
 — with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IMPROVEMENTS IN OR RELATING TO STEERING PIVOTS

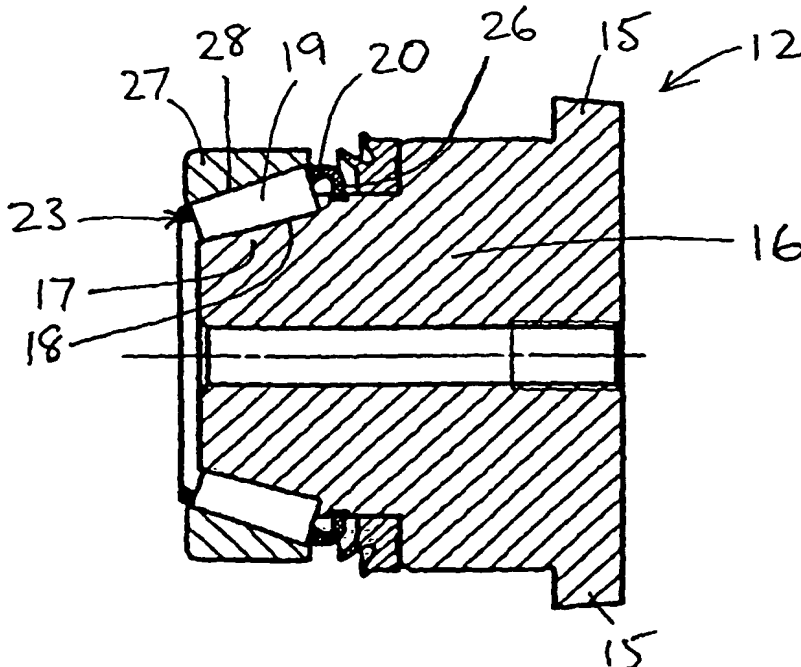

(57) Abstract: There is provided a steering pivot arrangement (12) having a pivot pin (16). The pivot pin (16) provides an inner race section (17) providing an inner raceway (18). A roller cage (20) retains a number of tapered rollers (19) on the inner raceway. The cage (20) has a number of resilient inward projections (26) spaced around its periphery. The projections (26) are clipped into an annular groove (22) behind a roller abutment rib at the large end of the raceway (18).

WO 03/076253 A1